


SPECIFICATIONS

EPSON STYLUS™ PRO 11880

Weight - approx. 150.5kg (excluding inks)

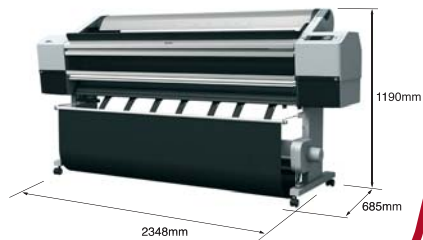

PRINTER TYPE

SIZE
INK COLOUR
HEAD CONFIGURATION

64 inch (1626mm)
8 colour
TFP head (new)
360 nozzles x 9 slot with Epson Variable-sized Droplet Technology

PRINT QUALITY

MAXIMUM RESOLUTION
MINIMUM DOT SIZE
INK SYSTEM

2880 x 1440 dpi
3.5pl
UltraChrome K3 ink (C,VM,Y,Lc,Vlm,Lk,Llk,Photo K,Matte K) with CSIC with 9 slots*.
*only one of Matte K and Photo K could be used for a print.
Individual high capacity ink cartridge (new cartridge)
Ink Capacity: Gross 700ml.

PRINT SPEED[^]

PREMIUM PHOTO PAPER SERIES
ULTRASMMOOTH FINE ART PAPER

Resolution	A0	60"
1440 x 720 dpi	16 min	45.8 min
1440 x 720 dpi	16 min	45.8 min

MEDIA HANDLING
PAPER OUTPUT CAPABILITY

Roll paper/ Cut sheet (manual insertion)
Auto take up reel, Output bin, Single roll system,
Auto media cutter

MEDIA DIMENSION

ROLL PAPER

Width: 16" to 64" (406mm to 1626mm)
Length at 1 job: 5" to 590" (127mm to 15000mm)
Width: 8.26" to 44" (210mm to 1118mm)
Length: 10" to 62" (279mm to 1580mm)

CUT SHEET

PRINTING AREA

PRINTABLE WIDTH
BORDERLESS
(LEFT & RIGHT BORDERLESS)

(Width) 64.02" (1626mm)
(Width) 10" (254mm), 300mm, 13" (329mm/A3+),
16"(406mm), 17"(432mm), 515mm (B2), 594mm (A1),
24" (610mm), 728mm (B1), 36" (914mm), 44" (1118mm),
50" (1271mm), 54" (1372mm)

ROLL DIMENSIONS

CORE DIAMETER

2 inch or 3 inch
Max. Outside Diameter 150mm

AUTOMATIC ADJUSTMENT FUNCTION

Automatic Ink dot Detector
Auto Print Head Alignment

HOST INTERFACES

USB2.0/1.1** and 10/100/1000 Base-T

MEMORY

256MB (Main). 64MB (Network)

LANGUAGES

ESC/P2 Raster and /P3

NOISE dB(A)

Approx. 50dB(A)

POWER CONSUMPTION

POWER SUPPLY
PRINTING
SLEEP
POWER OFF

AC 100 - 240V
Approx. 100W
Approx. 20W
Approx. 1W or less

SUPPORTED OS

Window 2000, XP, XP x64, Vista, Vista x64, Mac OS X

UTILITY SOFTWARE

Epson LFP Remote Panel, N/W utility

OPERATION ENVIRONMENT

TEMPERATURE
RELATIVE HUMIDITY

10-35°C
20 - 80% (no condensation)

** To use USB port, your PC must conform to PC98 specifications, and have Windows preinstalled. Consult the documentation provided with your PC for further information about USB connectivity. Note also that printing errors may occur if non-standard cables or more than 2 USB hub connections are used.



*1
Photo A2

[^] Printing speed test results vary according to system configuration, dpi setting, and print mode setting. However, documents and photos other than those pictured above can be substituted without significantly affecting test results.



EPSON is the registered trademark of Seiko Epson Corporation.

All other product names and other company names used herein are for identification purpose only and may be the trademarks or registered trademarks of their respective owners.

EPSON disclaims any and all rights in those marks. Scan/Print samples shown herein are simulations. Specifications are subject to change without notice.

SUPPLIES

EPSON UltraChrome™ K3 Inks

T591100	Photo Black
T591200	Cyan
T591300	Vivid Magenta
T591400	Yellow
T591500	Light Cyan
T591600	Vivid Light Magenta
T591700	Light Black
T591800	Matte Black
T591900	Light Light Black

Others

Options	
C811231	2/3 Inch Dual Tension Roll Feed Spindle
C890401	Paper Basket
C890191	Maintenance Tank
C815291	Auto Cutter Blade

INDIA - (91) 80-305-15000, CALCUTTA - 228 31589/90,
CHENNAI - 302 77500, MUMBAI - 282 61515/16/17,
NEW DELHI - 306 15000
INDONESIA - (62) 21-572-3161
MALAYSIA - (60) 3-562-88288
PHILIPPINES - (632) 813-6567
SINGAPORE - (65) 6586-5500, (65) 6586-3111
THAILAND / INDOCHINA - (662) 685-9888

Dealer's Stamp

EPSON
EXCEED YOUR VISION

www.epson.com.sg

Printed in Sep 2007